


油位传感器用厚膜电阻板

TFR for Fuel Level Sensor

特点 Features


FIS

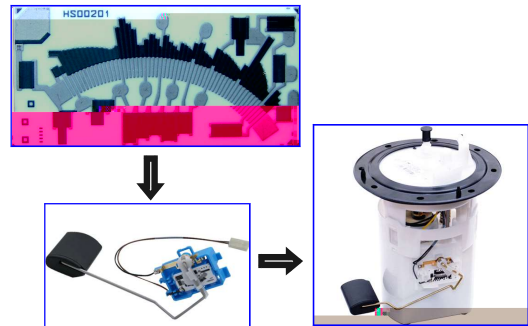

额定值 Ratings

- * : $^{\circ}\text{C} \sim ^{\circ}\text{C}$
- * : %
- * : , Strong adhesion.
- * (**0.25 ± 0.05N**) **200** **500**
- ±
- * : ± ± Ω
- * : ± $^{\circ}\text{C}$

相关产品 Other Applications

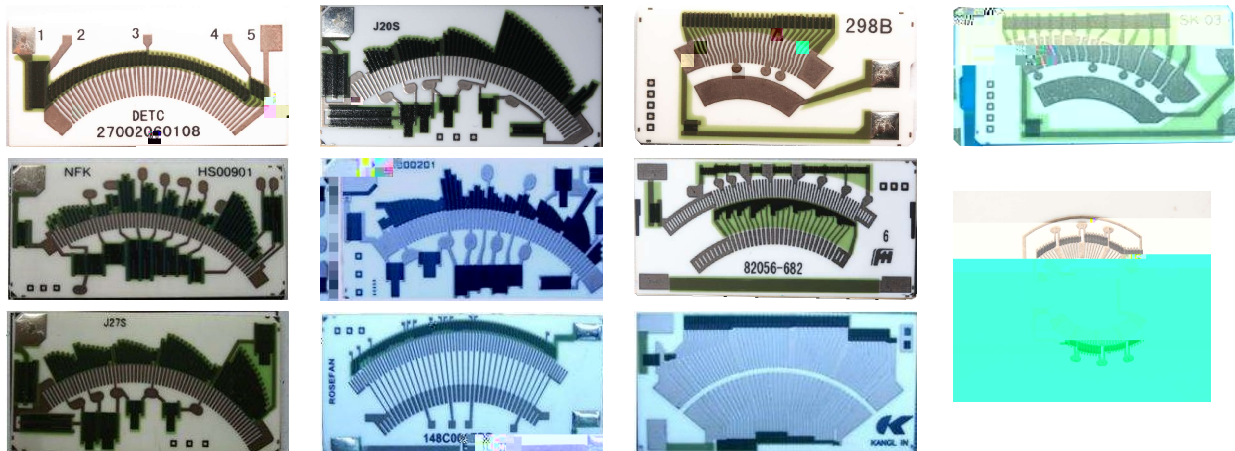

*

◆ 特性 Characteristics

			$0.25 \pm 0.05 N$ 200 () 500 \pm
	Δ $<$	85% 92% $+15\%$ () \pm $^{\circ}C$ \pm $^{\circ}C$ \pm	
	Δ $<$	270 ± 5 $(5 \pm 1)s$ $(24 \pm 4)h$ \pm $^{\circ}C \pm$ $^{\circ}C$ \pm	
		$^{\circ}C$ $^{\circ}C$ $^{\circ}C$ $^{\circ}C$ $^{\circ}C$	
	Δ $<$	$-40 (30)$ (5) $85 (30)$ 5 $^{\circ}C$ \sim $^{\circ}C$;	
	Δ $<$	25 () 5	
70 $^{\circ}C$	Δ $<$	70 ± 2 1000 1.5 , 0.5 1000 $^{\circ}C \pm$ $^{\circ}C$	
	Δ $<$	$^{\circ}C \pm$ $^{\circ}C$, \pm ,	
	Δ $<$	(-55 ± 1) $1000h$ \pm $^{\circ}C$	
	Δ $<$	(125 ± 1) \pm $^{\circ}C$ $1000h$	

*

修订履历 Revision History

Revision

日期

- 原版 The original version.