

## 特点 Features

: 3000V

Max Operating voltage: 3000V

Stable electrical capability, high reliability

Superior mechanical and frequency characteristics

RoHS

Compliant with RoHS directive

Halogen free requirement

MSL 1

MSL Class:MSL 1

## 应用领域 Application

## 结构 Construction

- ①
- ②
- ③

Percent Rated Load

-75 -50 -25 50 100 125 150


- 1.  $V_{avg}$  DC or AC RMS value.
- 2.  $V_{lim}$  for Limiting element voltage
- Rated voltage(V)
- Rated power(W)
- Normal resistance( $R_N$ )

## 特性 Characteristics

Item	Specifications	(IEC60115-1) Test Methods (IEC60115-1)
Solderability	≥ 95% 95% Cover Min	IEC 60115-1 4.17 245°C ± 5°C      3s ± 0.3s Lead-free solder bath at 245°C ± 5°C for 3s ± 0.3s
Resistance to Soldering Heat	No mechanical damage $\Delta R \leq \pm(1.0\%R+0.05\Omega)$	IEC 60115-1 4.18 270°C ± 5°C      10s ± 1s Lead-free solder bath at 270°C ± 5°C for 10s ± 1s
Substrate Bending Test	No mechanical damage $\Delta R \leq \pm(1.0\%R+0.05\Omega)$	IEC 60115-1 4.33 (Bending distance): 0603, 0805:5mm ;1206, 1210: 4mm; 2010, 2512: 2mm (Duration): 60s ± 5s
Shear Test	No mechanical damage	IEC 60115-1 4.32 (Applying force): 0603: 5N;0805: 9N;1206, 1210: 25N; 2010, 2512: 45N. (Duration): 10s ± 1s.
T.C.R	Within specified T.C.R	IEC 60115-1 4.8 +20°C/-55°C/+20°C/+125°C/+20°C
Rapid Change of Temperature	No mechanical damage $\Delta R \leq \pm(1.0\%R+0.05\Omega)$	IEC 60115-1 4.19 0603, 0805, 1206, 1210, 2010, 2512: -55°C(30 )~ (5 )~ 155°C(30 ), 300 0603, 0805, 1206, 1210, 2010, 2512: -55°C(30min)~ normal temperature(5min)~ 155°C(30min) , 300 cycles.
Short Time Overload	No mechanical damage $\Delta R \leq \pm(5.0\%R+0.05\Omega)$	IEC 60115-1 4.13 2.5      5 2.5 times rated voltage or max. overload voltage whichever is lower for 5s.
Damp Heat Steady State	No mechanical damage $\Delta R \leq \pm(3.0\%R+0.05\Omega)$	
70°C 耐久性 Endurance at 70°C	No mechanical damage $\Delta R \leq \pm(3.0\%R+0.05\Omega)$	IEC 60115-1 4.25.1 70°C ± 2°C, 1000      1.5 0.5 70°C ± 2°C, 1000h, rated voltage or limiting element voltage whichever is lower for 1.5h ON/0.5h OFF.
Endurance at Upper Category Temperature	No mechanical damage $\Delta R \leq \pm(2.0\%R+0.05\Omega)$	IEC 60115-1 4.25.3 0603, 0805, 1206, 1210, 2010, 2512: 155°C ± 2°C, 1000h.
Insulation Resistance	1000MΩ Min	IEC 60115-1 4.6 100V 15V      1 Apply DC 100V ± 15V between substrate and terminations for 1min, then check insulation resistance.
Component Solvent Resistance	No mechanical damage $\Delta R \leq \pm(1.0\%R+0.05\Omega)$	IEC 60115-1 4.29 (IPA), 23°C ± 5°C, 10 Iso-propyl alcohol (IPA), 23°C ± 5°C, 10h.

包装 P

### 推荐焊盘尺寸 Reco

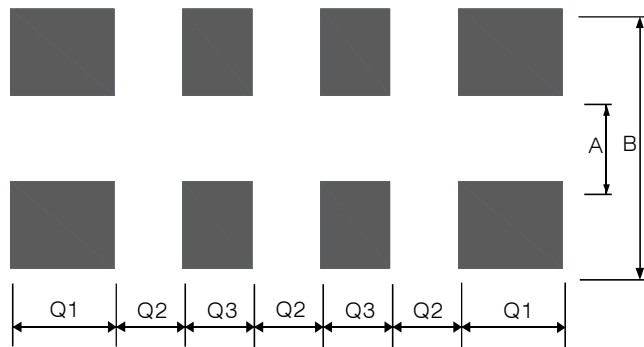


unit: mm

	A	B			
2R01					
2R02					

## ◆ 包装 Packaging

### ● Paper Taping

01005 0201 0402 2R01 4R01 2R02 4R02  
For 01005 0201 0402 2R01 4R01 2R02 4R02

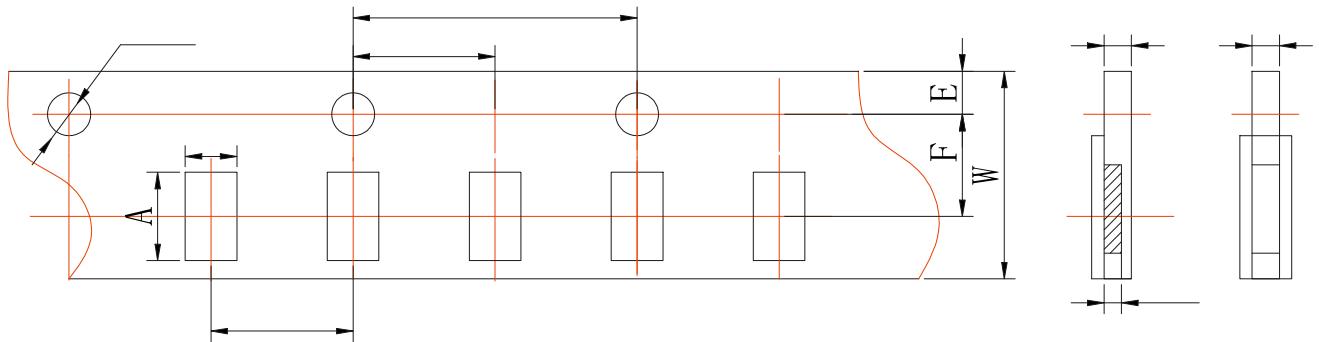


unit: mm

Type	A	B	W	F	E
01005	0.45 0.02	0.25 0.02	8.00 0.02	3.50 0.05	1.75 0.05
0201	0.70 0.10	0.40 0.10	8.00 0.20	3.50 0.05	1.75 0.10
0402	1.15 0.10	0.65 0.10	8.00 0.20	3.50 0.05	1.75 0.10
2R01	0.97 0.05	0.77 0.05	8.00 0.20	3.50 0.05	1.75 0.10
4R01	1.57 0.05	0.77 0.05	8.00 0.20	3.50 0.05	1.75 0.10
2R02	1.45 0.10	1.20 0.10	8.00 0.20	3.50 0.05	1.75 0.10
4R02	2.20 0.10	1.20 0.10	8.00 0.20	3.50 0.05	1.75 0.10

unit: mm

Type	P	P0	P1	D0	T1	T
01005	2.00 0.05	4.00 0.10	2.00 0.05	1.55 0.02	0.17 0.02	0.31 0.02
0201	2.00 0.05	4.00 0.10	2.00 0.05	1.50 0.10	0.28 0.04	0.42 0.05
0402	2.00 0.05	4.00 0.10	2.00 0.05	1.50 0.10	/	0.44 0.05
2R01	2.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	/	0.60 0.10
4R01	2.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	/	0.60 0.10
2R02	2.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	/	0.60 0.10
4R02	2.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	/	0.60 0.10

0603 0805 0508 1206 0612 1210 4R03:  
For 0603 0805 0508 1206 0612 1210 4R03:

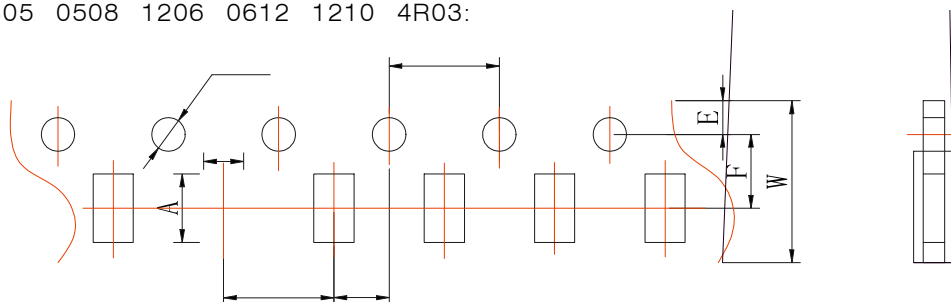

unit: mm


Type	A	B	W	F	E
0603	1.80 0.10	1.05 0.10	8.00 0.20	3.50 0.05	1.75 0.10
0805	2.30 0.10	1.50 0.10	8.00 0.20	3.50 0.05	1.75 0.10
0508	2.30 0.10	1.50 0.10	8.00 0.20	3.50 0.05	1.75 0.10
1206	3.50 0.20	1.90 0.20	8.00 0.20	3.50 0.05	1.75 0.10
0612	3.50 0.20	1.90 0.20	8.00 0.20	3.50 0.05	1.75 0.10
1210	3.50 0.20	2.80 0.20	8.00 0.20	3.50 0.05	1.75 0.10
4R03	3.50 0.20	1.90 0.20	8.00 0.20	3.50 0.05	1.75 0.10

unit: mm

Type	P	P0	P1	D0	T	
					Thick Film Resistor and Thin Film Resistor	Metal Foil Resistor
0603	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.60 0.10	0.75 0.10
0805	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	0.95 0.10
0508	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	0.95 0.10
1206	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	0.95 0.10
0612	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	0.95 0.10
1210	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	
4R03	4.00 0.10	4.00 0.10	2.00 0.05	1.50 0.10	0.75 0.10	

● Embossed Taping

2010 2512 1225  
For 2010 2512 1225

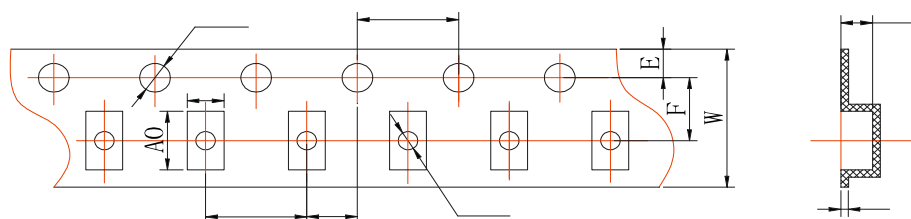

unit: mm

Type	A0	B0	W	F	E	t
2010	5.50±0.15	2.82±0.15	12.00 0.10	5.50 0.10	1.75 0.10	0.25±0.05
2512	6.78±0.15	3.45±0.15	12.00 0.10	5.50 0.10	1.75 0.10	0.25±0.05
1225	6.78±0.15	3.45±0.15	12.00 0.10	5.50 0.10	1.75 0.10	0.25±0.05

unit: mm

Type	P	P0	P1	D0	D1	K0	
						Thick Film Resistor and Thin Film Resistor	Metal Foil Resistor
2010	4.00 0.10	4.00 0.10	2.00 0.05	1.50+0.10/-0	1.50 0.10	0.84 0.10	0.84 0.10
2512	4.00 0.10	4.00 0.10	2.00 0.05	1.50+0.10/-0	1.50 0.10	0.81 0.10	1.00 0.10
1225	4.00 0.10	4.00 0.10	2.00 0.05	1.50+0.10/-0	1.50 0.10	0.81 0.10	1.00 0.10

Reel

● Packaging Quantity

Packaging style	7 7inch dia.Reel			13 13inch dia.Reel	
Type	01005	0402 2R01 2R02 4R01 4R02	0603 0805 1206 1210 4R03 0508 0612	0201 0402	0603 0805 1206
Quantity(pcs)	20000			50 00h□	205

**IEC E-24、E-96系列电阻值代码对照表**

**IEC E-24、E-96 Series Resistance Cross-reference List**

● E-24 E-24 series(  $10^n$  )

( unit 0.001 0.01 0.1 1 10 100 1k 10k 100k 1M 10M 100M 1000M )

Table One:

1.0	1.5	2.2	3.3	4.7	6.8
1.1	1.6	2.4	3.6	5.1	7.5
1.2	1.8	2.7	3.9	5.6	8.2
1.3	2.0	3.0	4.3	6.2	9.1

● E-96 E-96 series (  $10^n$  )

( unit 0.001 0.01 0.1 1 10 100 1k 10k 100k 1M 10M 100M 1000M )

Table Two:

1.00	1.33	1.78	2.37	3.16	4.22	5.62	7.50
1.02	1.37	1.82	2.43	3.24	4.32	5.76	7.68
1.05	1.40	1.87	2.49	3.32	4.42	5.90	7.87
1.07	1.43	1.91	2.55	3.40	4.53	6.04	8.06
1.10	1.47	1.96	2.61	3.48	4.64	6.19	8.25
1.13	1.50	2.00	2.67	3.57	4.75	6.34	8.45
1.15	1.54	2.05	2.74	3.65	4.87	6.49	8.66
1.18	1.58	2.10	2.80	3.74	4.99	6.65	8.87
1.21	1.62	2.15	2.87	3.83	5.11	6.81	9.09
1.24	1.65	2.21	2.94	3.92	5.23	6.98	9.31
1.27	1.69	2.26	3.01	4.02	5.36	7.15	9.53
1.30	1.74	2.32	3.09	4.12	5.49	7.32	9.76



● E 96 0603

E-96 series(0603) multiplied Cross-reference List and Resistance Cross-reference List

Table Three:

multiplied	$10^0$	$10^1$	$10^2$	$10^3$	$10^4$	$10^5$	$10^6$	$10^7$	$10^{-1}$	$10^{-2}$	$10^{-3}$
code	A	B	C	D	E	F	G	H	X	Y	Z

Table Four:

Code	E-96 E-96 resistance	Code	E-96 E-96 resistance	Code	E-96 E-96 resistance	Code	E-96 E-96 resistance
01	100	25	178	49	316	73	562
02	102	26	182	50	324	74	576
03	105	27	187	51	332	75	590
04	107	28	191	52	340	76	604
05	110	29	196	53	348	77	619
06	113	30	200	54	357	78	634
07	115	31	205	55	365	79	649
08	118	32	210	56	374	80	665
09	121	33	215	57	383	81	681
10	124	34	221	58	392	82	698
11	127	35	226	59	402	83	715
12	130	36	232	60	412	84	732
13	133	37	237	61	422	85	750
14	137	38	243	62	432	86	768
15	140	39	249	63	442	87	787
16	143	40	255	64	453	88	806
17	147	41	261	65	464	89	825
18	150	42	267	66	475	90	845
19	154	43	274	67	487	91	866
20	158	44	280	68	499	92	887
21	162	45	287	69	511	93	909
22	165	46	294	70	523	94	931
23	169	47	301	71	536	95	953
24	174	48	309	72	549	96	976

厚膜电阻阻值

E-24 ( 0603 5%)

E-24 series: Express resistance value on the glass side with three digits, the first two digits should be significant and the third one denote number of zeros.

For example:

—————▶ 30K

—————▶ 33

E-96 E24 0508 0805 0612 1206 1225 1210 2010 2512 1% & 0.5%

E-96 series & E-24 series (0508 0805 0612 1206 1225 1210 2010 2512 1% & 0.5%):  
Express the resistance value with four digits, the first three digits are significant figures and the fourth denotes the number of zeros.

—————▶ 100K

Express the resistance value with three code, the first two digit code denote the resistance of E-96 series, and the third code of letter denote the multiplier (see the table three and four).

2M

\* R The decimal point should be expressed by R .

—————▶ 5.6

—————▶ 22

\* 0 The jumper should be expressed by 0

For example:

—————▶ 0


—————▶ 0

\* 0402 For the chip resistor( 0402), there is no mark on the glass side.

## 薄膜电阻阻值代码及标记规则

Description for Resistance Value Code and Marking of Thin Film Chip Resistor

•

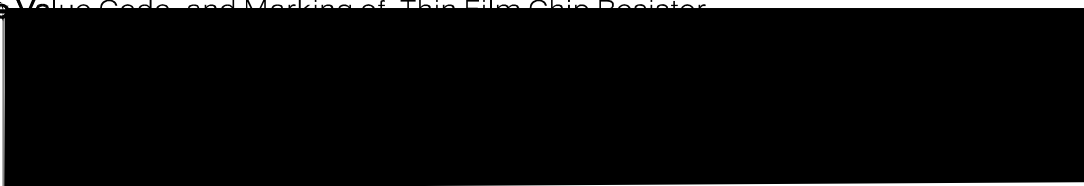

电流检测电阻阻值代码及标记规则

Description for Resistance Value Code and Marking of Current Sensing Thick Film Chip Resistor

•

**Application of the products in a special environment can deteriorate product performance:**

1. Use in various types of liquid, including water, oils, chemicals, and organic solvents.
2. Use outdoors where the products are exposed to direct sunlight, or in dusty places.
3. Use in places where the products are exposed to sea winds or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub> etc.
4. Use in places where the products are exposed to static electricity or electromagnetic waves.
5. Use in proximity to heat-producing components, plastic cords, or other flammable items.
6. Use involving sealing or coating the products with resin or other coating materials.
7. Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering.
8. The substrate of chip resistors is alumina. Cracks may occur at the connection of solder (solder fillet portion) due to the difference of the coefficient of thermal expansion from a mounting board when heat stress like heat cycle, etc. are repeatedly given to them. Care should be taken to the occurrence of the cracks when the change in ambient temperature or ON/OFF of load is repeated. The occurrence of the crack by heat stress may be influenced by the size of a pad, solder volume, heat radiation of mounting board etc., so please pay careful attention to designing when a big change in ambient temperature and conditions for use like ON/OFF of load can be assumed.

5 30 30% 70%

Pr-

Recommended wave solder profile

260°C max

Time 9s - 0s

130°C - 130

Recommended solder alloy 98.5Sn/3.0Ag/0.5Cu

## Revision History

Version	日期Date		
V2020.1.0	2021-02-24	- 删除 E-24系列 客户特殊要求标记说明 Delete marking instructions for special requirements of customers	杜建业 Jianye Du
V2.0	2021-08-13	- Add the application. - Add the tolerance to Recommend Solder Pad Size.	卢振强 Zhenqiang Lu
V3.0	2022-02-25	- 附录中“包装数量”：修改0201尺寸为15K包装数量。 Revise the quantity of 0201 15Kpcs to Packaging Quantity. - 修改产品标记由数码体改为手写体。 Modify the product marking from digital to handwritten.	杜建业 Jianye Du

0201

及标记